

HOOK, X2 USED TO SECURE CABLES WITH TLE-WRAPS INCLUDED SCALE 1:1

SCALE 1:1

SCALE 1:1

ITEM	P/N	DISCRIPTION	COLOR	REMARK
1	E541463	ESY2211-2UWE-0-4G-6E-A14-GMS-BK-NS	BLACK	STD5.0
2	E541651	ESY2211-2UWE-0-4G-6E-A14-GMS-WH-NS	WHITE	STD5.0

DIMENSIONS ARE IN MILLIMETERS


**elo**

MS603496

DATE: 05/20/2024

REV: A

ELO PERIPHERAL MOUNTING INTERFACE (1 PER SIDE)  
(SEE WEBSITE FOR DIMENSIONAL DRAWINGS OF COMPATIBLE PERIPHERALS)

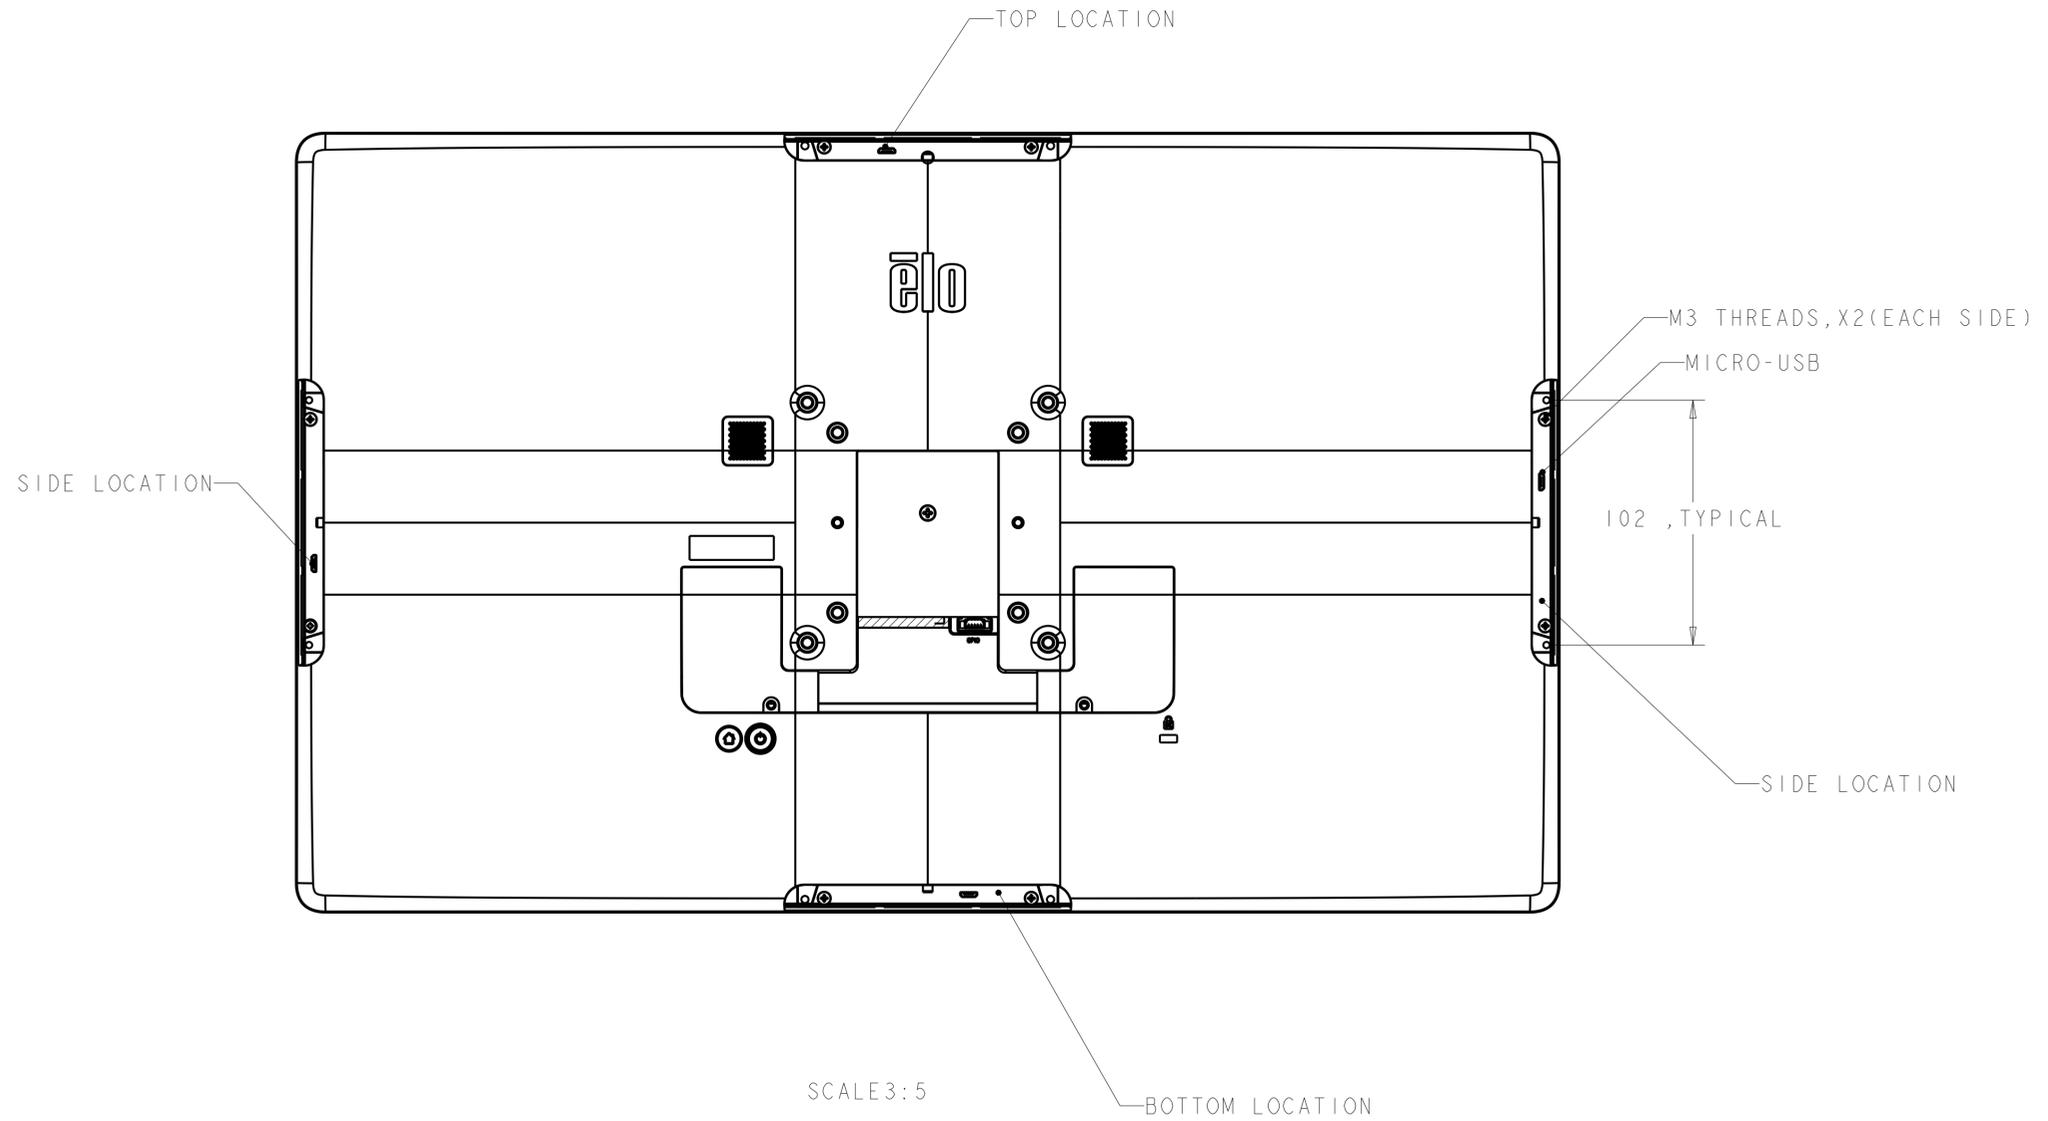

TITLE: DIMENSIONAL DRAWING: 21.5" STD


POWER OVER ETHERNET (POE) ADAPTER KIT P/N: E669163, ELO-KIT-POE-ADAPTER-5.0  
(OPTIONAL KIT, PURCHASED SEPARATELY)  
POE COVER REMOVED AND POE PERIPHERAL INSTALLED

REQUIRES EXTENDED M4 SCREWS INCLUDED WITH POE KIT,  
SCREWS PASS THROUGH POE MODULE/SPACER INTO ORIGINAL VESA MOUNT

VESA MOUNT

SPACER FOR 100X100 MM VESA MOUNT  
(DON'T NEED WHEN USE 75X75 MM VESA MOUNT)

34.7

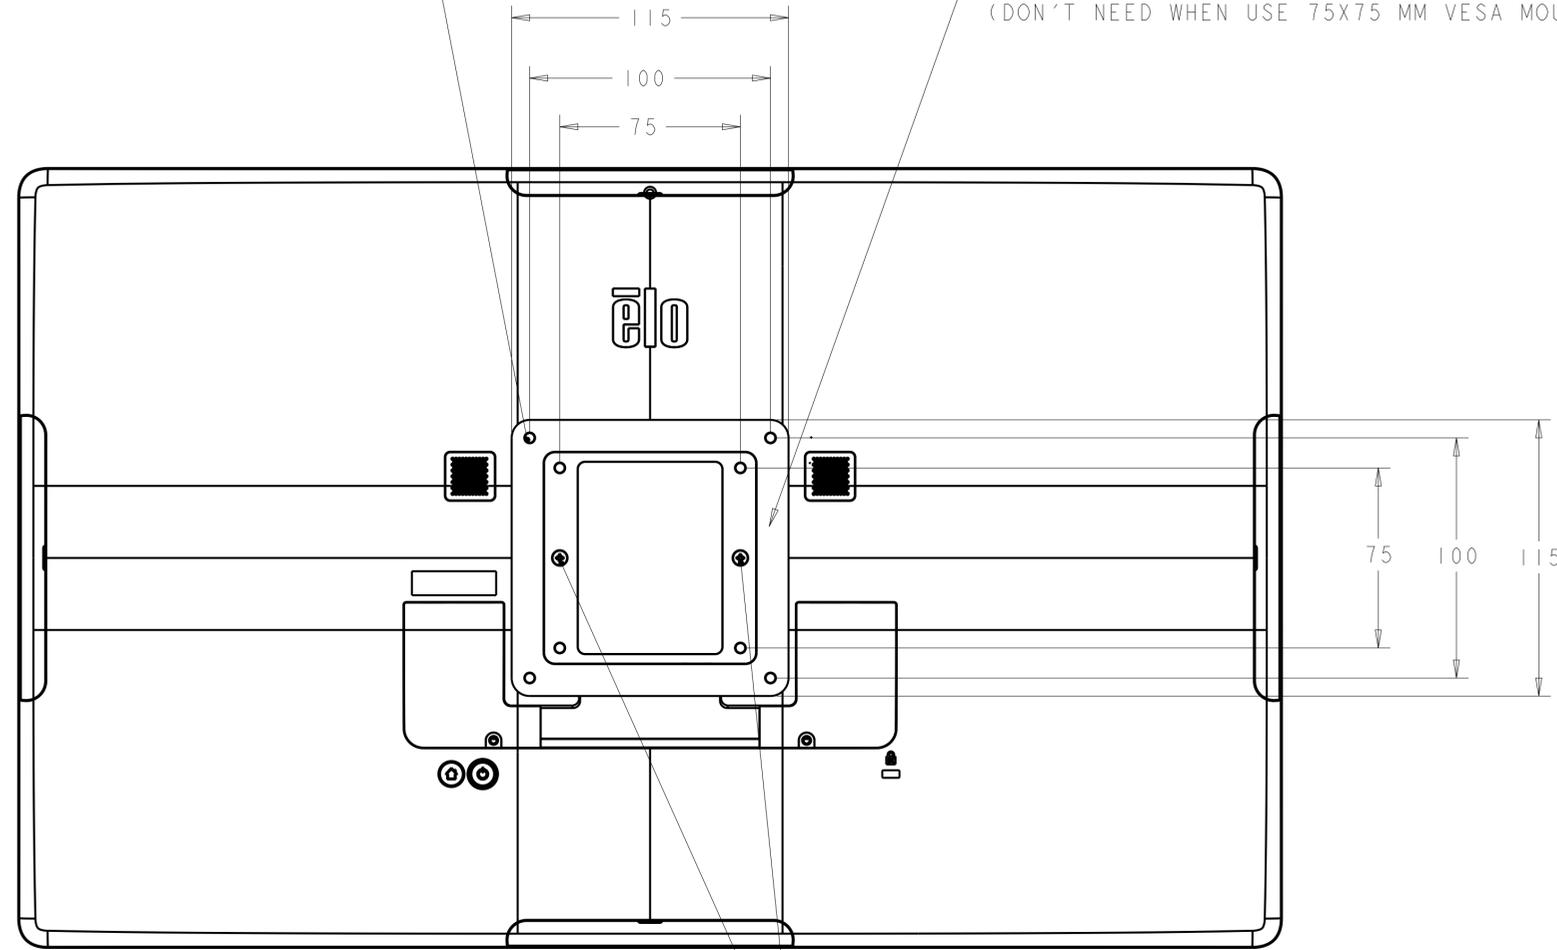

SCALE 3:5

MOUNTING SCREW M3X8, 2 PCS  
TO SECURE POE PERIPHERAL INTO POE DOCKING BAY